

# CLOPAY COMMERCIAL – MODELS 902, 903 architectural series



CONSTRUCTION  
**2 1/8"**  
THICKNESS

WARRANTY  
**5YR**  
LIMITED  
CONSTRUCTION

*Model 903 with Insulated Glass and Bottom  
Insulated Aluminum Panel, Powder-Coated Frame*

## ALUMINUM FULL-VIEW DOORS

Clopay Aluminum Full-View doors offer designers the flexibility to let varying degrees of light in while complementing the surrounding structure. A wide selection of standard and custom glazing types make a bold statement in retail and store environments.

- 2-1/8" (54 mm) thick construction, 6063-T5 extruded aluminum alloy with integral reinforcing fin for maximum durability.
- Exclusive, capped rail construction helps seal out the elements and adds to door durability.
- Tongue-and-groove meeting rail.
- Available in a wide variety of powder-coated and anodized finish colors.
- Many glazing options available, including thermal glass, Low-E glass and polycarbonate panels in various colors.
- Model 902 features 44" (1.1 m) on center panel spacing with limited glazing options. Model 903 is fully customizable and features equal panel spacing.

[clopaycommercial.com](http://clopaycommercial.com)



Integral reinforcing fin adds durability and strength.

# OPTIONS


## GLASS/PANEL OPTIONS




## CUSTOM POWDER COAT

Powder coat available in a variety of finishes, colors as well as custom formulations to complement your building design.

## GLASS/PANEL OPTIONS

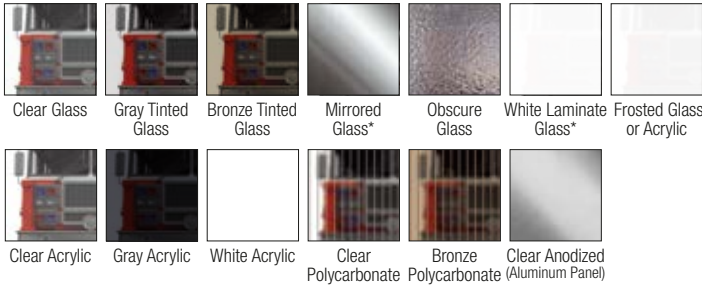

## FRAME/SOLID PANEL COLOR OPTIONS



\* Mirrored and laminate not available in 1/2".  
 † Additional cost and lead time may apply.

Glass thickness available in 1/8", 1/4" and 1/2". Low-E available on insulated glass. Tri-wall polycarbonate thickness available in 1/2". Panels can be aluminum to match the aluminum frame. Glass/acrylic panels may be combined with aluminum panels. Due to the anodizing process, slight color variation may occur. Custom powder coat, Color Blast® and anodized finish available. The use of "Bronze (Painted)" is recommended for a more consistent bronze finish color.

Acrylic windows require special cleaning. Never use products that contain ammonia or petroleum products to clean acrylic. Please visit [clopaydoor.com/acrylic](http://clopaydoor.com/acrylic) for complete details. See your Clopay Dealer for details.

# FEATURES

| STANDARD HARDWARE   |  |
|---|--|
| TPE astragal in aluminum retainer                               |  |
| Commercial 10-ball steel rollers (nylon tires available)        |  |
| Steel step plate and lift handle                                |  |
| Galvanized steel end stiles                                     |  |
| Inside slide lock for increased security                        |  |
| 2" (50.8 mm) or 3" (76.2 mm) track                              |  |
| 10,000 cycle springs  |  |
| Galvanized aircraft cable with minimum 7:1 safety factor        |  |
| Variety of track configurations to meet building specifications |  |
| MATERIALS AND CONSTRUCTION                                      |  |
| Panel Thickness   | 2-1/8" (54 mm)   |
| Exterior Surface  | 6062-T5 extruded aluminum alloy with integral reinforcing fin  |
| Max Width   | 24'2" (7.4 m)  |
| Max Height  | 20' (6.1 m)  |
| Exterior Colors   | Standard White, Bronze and Chocolate Painted. Clear, Bronze, Black and Dark Bronze Anodized. Custom paint available. |
| Limited Warranties*   | 5-year limited finish warranty<br>1-year hardware warranty   |

\*For full warranty details see the 902, 903 official warranty document, posted on [www.clopaydoor.com](http://www.clopaydoor.com).  
 For special sizes, applications and options, consult Commercial Information Assistance (CIA) at 1-800-526-4301.



For more information on these and other Clopay products, call 1-800-526-4301 or visit [clopaycommercial.com](http://clopaycommercial.com)



©2018 Clopay Building Products Company, Inc., a Griffon company.

## HEAVY-DUTY HARDWARE (where not standard)



Double-end hinge

3" Track

High performance hardware features 10 gauge end hinges, heavy-duty top bracket and 3" sealed roller with 5/8" stem.

## HIGH CYCLE SPRINGS



25,000, 50,000 or 100,000 cycle springs available.

## MULLIONS



Carry-away, roll-away or swing-up mullions are available on select sizes.

## EXHAUST PORT



Can be cut into any type of sectional door. Available in select sizes.



WindCode® reinforcement available up to W1 design pressure (DP) 14 PSF, depending on size. Doors tested 50% greater than DP.



Upgrade your standard door with industrial-grade components.

## DISTRIBUTED BY:

