# THERMALEX®

### **COMMERCIAL-INDUSTRIAL SECTIONAL OVERHEAD DOORS**



#### The Complete Solution for Quality, Versatility and Energy Efficiency.

The Thermalex<sup>®</sup> Series from Upwardor<sup>®</sup> is a line of sectional overhead doors specifically designed for commercial and industrial applications. They're built to last and their superior quality provides high-levels of thermal efficiency making them the ideal choice for any sectional overhead door application.

#### **KEY FEATURES AND BENEFITS:**

- · Designed for commercial and industrial applications.
- Environmentally friendly CFC / HCFC free foamed-in-place polyurethane insulation provides maximum R-values, excellent energy efficiency and are LEED compliant.
- Constructed from the highest-quality materials, delivers remarkable performance and durability.
- Two continuous strip hinge reinforcement (TX450, TX450-20, TX500, TX500-20) permits the use of full hinge application.
- · Thermal break chemically sealed and bonded.
- · Sections are fully cuttable; perfect for slabs programs.
- Design options available on some models for wind loads up to 130 mph (209 km/h)





Garage Doors Designed for Life




### **THERMALEX®**

#### **PRODUCT SELECTION GUIDE & SPECIFICATIONS**

THICKNESS PRODUCT TYPE	<b>1-1/2</b> " (38.1mm) Insulated Foamed-In-Place	<b>1-3/4</b> " (44.5mm) Insulated Foamed-In-Place	<b>1-3/4</b> " (44.5mm) Insulated Foamed-In-Place	<b>2</b> " (50.8mm) Insulated Foamed-In-Place	2" (50.8mm) Insulated Foamed-In-Place
UPWARDOR <b>MODEL #</b>	THERMALEX TX380	THERMALEX <b>TX450</b>	THERMALEX <b>TX450-20</b>	THERMALEX <b>TX500</b>	THERMALEX TX500-20
PAINT/DELAMINATION WARRANTY (Finish / cracking / rust through)	5 YEAR LIMITED	10 YEAR LIMITED	10 YEAR LIMITED	10 YEAR LIMITED	10 YEAR LIMITED
HARDWARE / SPRING WARRANTY	1 YEAR	1 YEAR	1 YEAR	1 YEAR	1 YEAR
INSULATION TYPE / FOAM PROCESS	POLYURETHANE / CONTINUOUS	POLYURETHANE / CONTINUOUS	POLYURETHANE / CONTINUOUS	POLYURETHANE / CONTINUOUS	POLYURETHANE / CONTINUOUS
R-VALUE (Calculated)	14.1	16.3	16.3	18.4	18.4
THERMAL BREAK (Between exterior & interior skins)	CHEMICALLY BONDED & SEALED	CHEMICALLY BONDED & SEALED	CHEMICALLY BONDED & SEALED	CHEMICALLY BONDED & SEALED	CHEMICALLY BONDED & SEALED
SECTION JOINT	SHIPLAP w/ bubble weather seal	TONGUE AND GROOVE	TONGUE AND GROOVE	TONGUE AND GROOVE	TONGUE AND GROOVE
GAUGE STEEL SKIN (G60 Steel: exterior)	26 / 26	26 / 26	20 / 26	26 / 26	20 / 26
HINGE PLATE (Reinforcement strip)	SINGLE CONTINUOUS 1-1/4" 20ga Strip	TWO CONTINUOUS 1-1/4" 20ga Strip	TWO CONTINUOUS 1-1/4″ 20ga Strip	TWO CONTINUOUS 1-1/4″ 20ga Strip	TWO CONTINUOUS 1-1/4″ 20ga Strip
END STILES (20ga are standard)	20ga GALVANIZED	20ga or 16ga GALVANIZED	20ga or 16ga GALVANIZED	20ga or 16ga GALVANIZED	20ga or 16ga GALVANIZED
COLOURS AVAILABLE (Interior always white)	BRIGHT WHITE / BROWN	BRIGHT WHITE / BROWN / SILVER	BRIGHT WHITE ONLY	BRIGHT WHITE ONLY	BRIGHT WHITE ONLY
PANEL APPEARANCE (Texture)	SHALLOW HORZ. RIBS (Stucco embossed)	SHALLOW HORZ. RIBS (Stucco embossed)	FLUSH (Stucco embossed)	SHALLOW HORZ. RIBS (Stucco embossed)	FLUSH (Stucco embossed)
FULL VIEW ALUMINUM SECTIONS	N/A	AVAILABLE – V130G INSUL SEALED GLASS Painted – white, brown or clear anodized	AVAILABLE – V130G INSUL SEALED GLASS Painted – white	N/A	N/A

## **THERMALEX®**

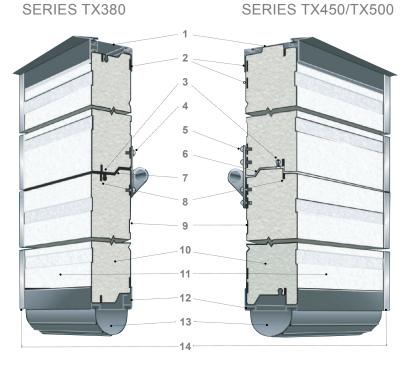

(1) Low temperature top retainer/seal (optional) (2) 20 Gauge continuous steel strip hinge reinforcement (3) Dual contact weather seal (4) Half hinge application (TX380) (5) Full hinge application (TX450/TX500) (6) Tongue & groove joint (7) Shiplap joint (8) Thermal break chemically sealed & bonded (9) Interior steel stucco embossed (10) Polyurethane core (11) Exterior steel stucco embossed (12) P.V.C. bottom retainer (13) Low temperature vinyl astragal (14) End stile with weather seal









MODEL U100 closed door

PASS DOOR

WINDOWS AVAILABLE: 18"x8", 24"x12" and 34"x16"



Actual door colour will vary from colour renditions

8025 Lawson Rd. Milton, ON Canada, L9T 5C4

Telephone 905 876 3667 Fax 905 876 3533 E-mail sales@upwardor.com



© 2015, ® and TM Trademark of Upwardor Inc. Duplication is prohibited without express written consent of Upwardor Inc. Design & specification subject to change without notice.

MODEL R112G with insulated windows

with full view sections

optional – only available in TX450 and TX450-20